# METHOD FOR STORING DATA, RECEIVER REALIZING THE SAME AS WELL AS BROADCASTING SYSTEM

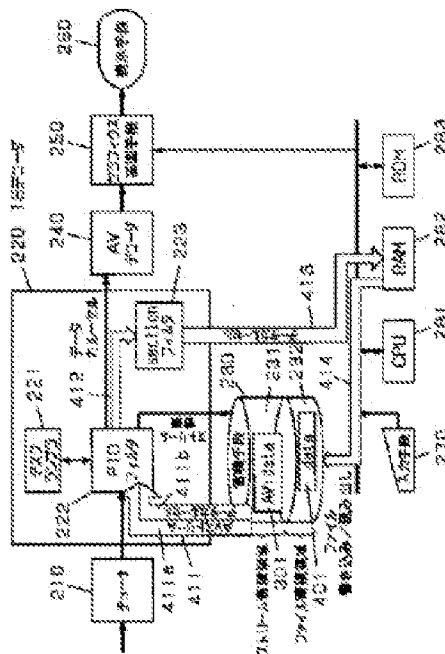| | |
|---|---|
| **Publication number:** | JP2002010182 |
| **Publication date:** | 2002-01-11 |
| **Inventor:** | KATAOKA MITSUTERU; TAKATORI MASAHIRO |
| **Applicant:** | MATSUSHITA ELECTRIC IND CO LTD |
| **Classification:** | |
| **- international:** | G11B27/00; H04H20/00; H04H20/28; H04H20/40; H04H60/27; H04N5/00; H04N5/44; H04N5/76; H04N5/765; H04N5/92; H04N7/173; H04N7/24; H04N7/52; H04N9/804; G11B27/00; H04H1/00; H04N5/00; H04N5/44; H04N5/76; H04N5/765; H04N5/92; H04N7/173; H04N7/24; H04N7/52; H04N9/804; (IPC1-7): H04N5/765; G11B27/00; H04H1/00; H04N5/44; H04N5/92; H04N7/173 |
| **- European:** | H04N5/00M6; H04N5/44N; H04N5/76; H04N7/24T4; H04N7/52D |
| **Application number:** | JP20000190905 20000626 |
| **Priority number(s):** | JP20000190905 20000626 |

**Also published as:**

EP1304877 (A1)
WO0201869 (A1)
US2004028388 (A1)
CN1439224 (A)
CN1235400C (C)

Report a data error here

## Abstract of JP2002010182

PROBLEM TO BE SOLVED: To realize a storage type broadcasting service even by a receiver having a low storage processing speed.
SOLUTION: A video voice and storage data are received, and stored as a stream in a stream storage area 231 of a storage medium 230. Thereafter, storage data is extracted from the stored stream and decoded, data contents in the decoded storage data are stored in a file storage area 232 of the medium 230 as a file, meta data in the decoded storage data is interpreted, and storage contents of the medium is controlled. When a reproduction of the video voice is requested, only the video voice is extracted from the stream by a PID filter 222, and reproduced.

Data supplied from the *esp@cenet* database - Worldwide